


RECORD 3S		SPECIFICATION VDI 2198					
1	Manufacturer	BALKANCAR RECORD JSC					
2	Type			DV 1992.33.241S DV 1992.33.271S ¹⁾	DV 1994.33.241S DV 1994.33.271S ¹⁾	DV 1996.33.241S DV 1996.33.271S ¹⁾	
3	Load capacity	Q		kg	6000	7000	8000
4	Load center	C	Load center to fork face	mm	600		
5	Drive unit		Battery/diesel/LPG		Diesel		
6	Type of operation		Pedestrian/rider seated/stand-on		Rider seated		
7	Lift	h_3	Lift height	mm	3300; 4000; 4500		
8	Overall dimensions	L_2	Length	mm	3450	3580	
9		B	Width	mm	2350		
10		h_1	Height, mast lowered	mm	2650; 3000; 3250	2715; 3065; 3315	
11		h_4	Height, mast extended	mm	4360; 4860; 5360	4415; 5115; 5615	
12		h_6	Height of overhead guard	mm	2450		
13	Internal combustion engine		Manufacturer, type		DEUTZ, diesel		
14	Transmission		Type, speeds (forward/backward)		Hydrodynamic		

- * Forklifts in accordance with BDS ISO 3691-1.
- * Size h_4 does not include a load backrest. When a backrest is fitted add + 680 mm.
- * Other variants of specifications and characteristics are possible.
- * Dimensions and parameters as shown are for reference only. They have been obtained under laboratory testing conditions. They could vary in accordance with the operation mode and the corresponding variants. "Balkancar Record" JSC reserves the right to introduce changes to the specifications and products without notice.

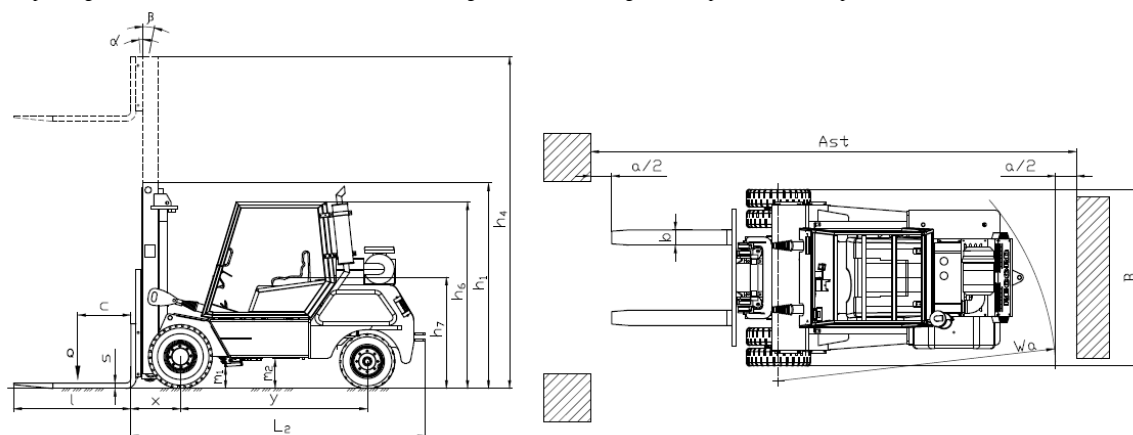

RECORD 3S		SPECIFICATION VDI 2198					
1	Manufacturer	BALKANCAR RECORD JSC					
2	Type			DV 1992.33.2TNS	DV 1994.33.2TNS	DV 1996.33.2TNS	
3	Load capacity	Q		kg	6000	7000	8000
4	Load center	C	Load center to fork face	mm	600		
5	Drive unit		Battery/diesel/LPG		Diesel		
6	Type of operation		Pedestrian/rider seated/stand-on		Rider seated		
7	Lift	h_3	Lift height	mm	3300; 4000; 4500		
8	Overall dimensions	L_2	Length	mm	3450	3580	
9		B	Width	mm	2240		
10		h_1	Height, mast lowered	mm	2650; 3000; 3250	2715; 3065; 3315	
11		h_4	Height, mast extended	mm	4360; 4860; 5360	4415; 5115; 5615	
12		h_6	Height of overhead guard	mm	2450		
13	Internal combustion engine		Manufacturer, type		DEUTZ, diesel		
14	Transmission		Type, speeds (forward/backward)		Hydrodynamic		

- * Forklifts in accordance with BDS ISO 3691-1.
- * Size h_4 does not include a load backrest. When a backrest is fitted add + 680 mm.
- * Other variants of specifications and characteristics are possible.
- * Dimensions and parameters as shown are for reference only. They have been obtained under laboratory testing conditions. They could vary in accordance with the operation mode and the corresponding variants. "Balkancar Record" JSC reserves the right to introduce changes to the specifications and products without notice.

